


8cm

| ORTHOTRYPO >8< | |
|---|------------------------------|
| TECHNICAL SPECIFICATIONS | |
| Dimensions on masonry ² in mm | 80x190x125 |
| Dimensions' tolerance | ± 2,1 % |
| Rectangularity | 90°± 1° |
| Compressive strength | 11,0 N/mm ² |
| Items per pallet | 430 items |
| Item weight | 1,750 kgr |
| Weight tolerance | ± 5,8 % |
| Pallet weight | 753 kgr |
| Masonry surface per pallet | 11,61 m ² |
| <small>* Wall thickness x Horizontal Brick Dimension x Vertical Brick Dimension</small> | |
| DETAILS OF IMPLEMENTATION | |
| Wall thickness without plaster | 80 mm |
| Thickness of mortar between bricks | Hor. = 10 mm Ver. = 10 mm |
| For a surface of one square meter of masonry: | |
| Bricks' quantity | 37 items/m ² |
| Bricks' weight | 65 kgr/m ² |
| Cement consumption ** | 9,6 Lt/m ² |
| <small>** For wall thickness more than 13cm the mortar consists of parallel cement strips</small> | |

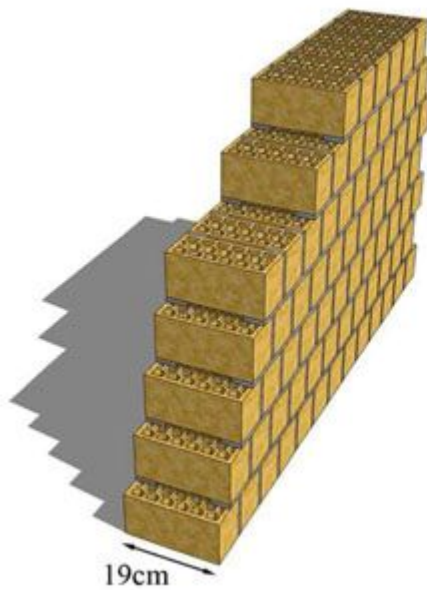

19cm

| ORTHOTRYPO >19< | |
|---|------------------------------|
| TECHNICAL SPECIFICATIONS | |
| Dimensions on masonry ² in mm | 190x80x125 |
| Dimensions' tolerance | ± 2,1 % |
| Rectangularity | 90°± 1° |
| Compressive strength | 11,0 N/mm ² |
| Items per pallet | 430 items |
| Item weight | 1,750 kgr |
| Weight tolerance | ± 5,8 % |
| Pallet weight | 753 kgr |
| Masonry surface per pallet | 5,22 m ² |
| <small>* Wall thickness x Horizontal Brick Dimension x Vertical Brick Dimension</small> | |
| DETAILS OF IMPLEMENTATION | |
| Wall thickness without plaster | 190 mm |
| Thickness of mortar between bricks | Hor. = 10 mm Ver. = 10 mm |
| For a surface of one square meter of masonry: | |
| Bricks' quantity | 82 items/m ² |
| Bricks' weight | 144 kgr/m ² |
| Cement consumption ** | 16,8 Lt/m ² |
| <small>** For wall thickness more than 13cm the mortar consists of parallel cement strips</small> | |